HDMI USB KVM Switch

User's Manual

Printed in China.
Printed on Recycled Paper.

Tested to Comply with FCC standards

HDMI USB KVM Switch

Product Information Guide

Model:

☐ 4PORT ☐ 2PORT

Limited Warranty

IN NO EVENT THE DIRECT VENDOR'S LIABILITY EXCEED THE PRICE PAID FOR THE PRODUCT FROM DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THE PRODUCT, DIST, OR ITS DOCUMENTATION.

The direct vendor makes no warranty or representation, expressed, implied, or statutory with respect to the contents or use of this documentation, and specially disclaims its quality, performance, merchantability, or fitness for any particular purpose. The direct vendor also reserves the right to revise or update device or documentation without obligation to update. Device or documentation without obligation to update. For further inquires please contact your direct vendor.

I. Description:

This Switcher is HDMI V1.3 Compliant and supports up to 36-bit Deep Color, Dolby True-HD or DTS HD Audio formats. IR Remote or push button on Front panel can fully select input for both outputs independently .

The especially recommanded 2/4 x 1 HDMI USB KVM SWITCH allows up to 2/4 HDMI source devices to be independently switched to one HDMI compatible monitor, HDTV's and/ or projectors.

II. Features:

* Saves space : single high definition display works with multiple PCs or HDMI source devices.
* Maintains high resolution video beautiful, sharp HDTV solution 480p/720i/720p/1080i/1080p
* Supports Win95/98/NT/2000/ME/XP/Vista, Win7, Linux, Unix, Netware, OS/2 and all application program.
* HDMI V1.3 & HDCP compliant.
* Console with USB interfaces for keyboard and mouse.
* One Console controls 2~4 computers and one additional USB device
* Supports both panel button and ″Hot Key″.

III. 2port Introduction:

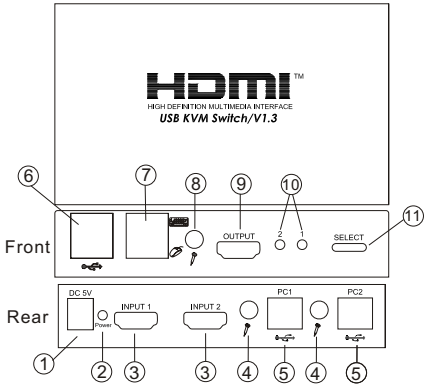

Number	Feature	Function
1	Power Jack	Power adaptor
2	LED	Power LED
3	HDMI Connector	HDMI Source
4	Audio Connector	Mic. Sink
5	USB B Tybe Connector	USB Input
6	USB A Tybe Connector	USB 2. 0 Device Sink
7	USB A Tybe Connector	Keyboard and Mouse sink
8	Audio Connector	Mic. Input
9	HDMI Connector	HDMI Device sink
10	LED	Work LED
11	Button	Switch

IV. 4port Introduction:

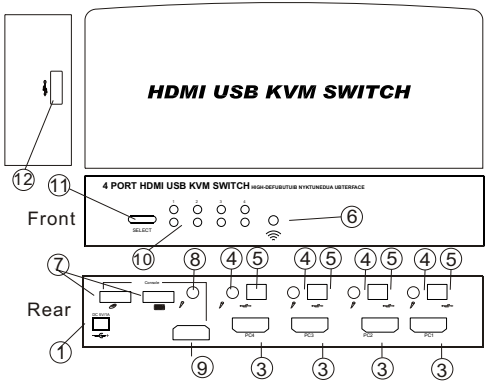

Number	Feature	Function
1	Power Jack	Power adaptor
2	LED	Power LED
3	HDMI Connector	HDMI Source
4	Audio Connector	Mic. Sink
5	USB B Tybe Connector	USB Input
6	IR Connector	Switch for IR
7	USB A Tybe Connector	Keyboard and Mouse sink
8	Audio Connector	Mic. Input
9	HDMI Connector	HDMI Device sink
10	LED	Work LED
11	Button	Switch
12	USB A Tybe Connector	USB 2. 0 Device sink

V.2port Installation:

● **Application for PC**

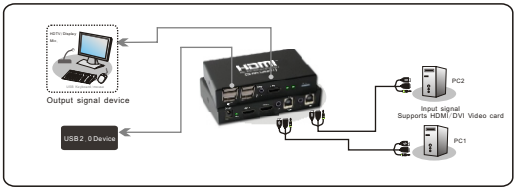

● **Application for HDMI/DVI signal device**

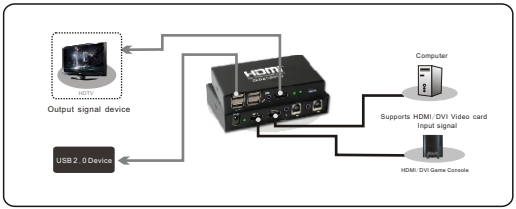

VI. 4port Installation:

● **Application for PC**

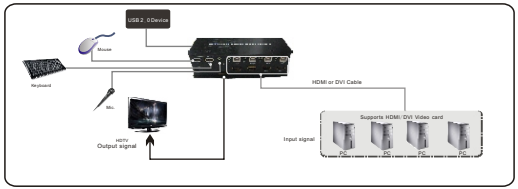

● **Application for HDMI/DVI signal device**

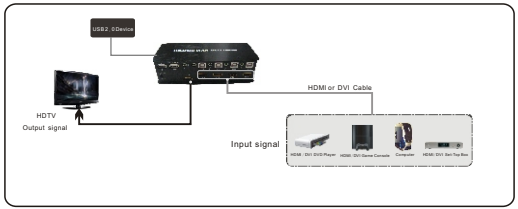

Ⅶ. Specifications：

Model	2PORT HDMI USB KVM Switch	4PORT HDMI USB KVM Switch
Input HDMI F connector	2	4
Output HDMI F Connector	1	1
Selection Method	Hot key, Front Push Button	Front Push Button, IR Remote
Bandwidth	2.25 Gbps	
Resolution	480i, 480p, 720i, 1080i, 1080p	
EX.Power adaptor	DC 5V 2A	DC 5V 1A
Housing	Metal	
Dimension(mm)	120.5(L) x 72.5(W) x 24(H)	171(L)×75.5(W)×46.5(H)
Product Weight(Kg)	0.2kg	0.3kg
Input connector / device	Video：HDMI x 1 Mic.：3.5ΦPhone jack x 2 Mouse / keyboard：USB / B Type x 2	Video：HDMI x 4 Mic.：3.5ΦPhone jack x 4 Mouse / keyboard：USB / B Type x 4
Output connector / device	Video：HDMI x 1 Mic.：3.5ΦPhone jack x 1 USB 2.0 device：USB / A double Type x 2	Video：HDMI x 1 USB 2.0 device： USB / A double Type x 1

Ⅷ.USB Function:

Overview

The high speed usb hub is compliant with the High speed USB specification. It provides easy Plug and play USB expansion. Just like the USB1.1,you can connect as many as 127 devices to your computer using multiple USB 2.0 hub. All ports are fully supported for compatibility With USB peripherals.

Features

- Compliant with universal serial bus specification revision 2.0.
- Supports plug&play and hot swappable capability.
- Equips with over-current detection and protection.
- Self power mode only.
- Connects up to 127 usb devices.
- Indicates working status with leds.
- Supports Windows 98/98SE/ME/2000/XP/Vista/MAC OS 10.1 or Higher.